

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 20 TOWNSHIP 15 RANGE 4

DATE: 12-16-02 8-9-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 5-25-01


IN. S.P.C. E ZONE NAD '83

NAME: 15042005

N: 497702.9753(m)

E: 61882.3404(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

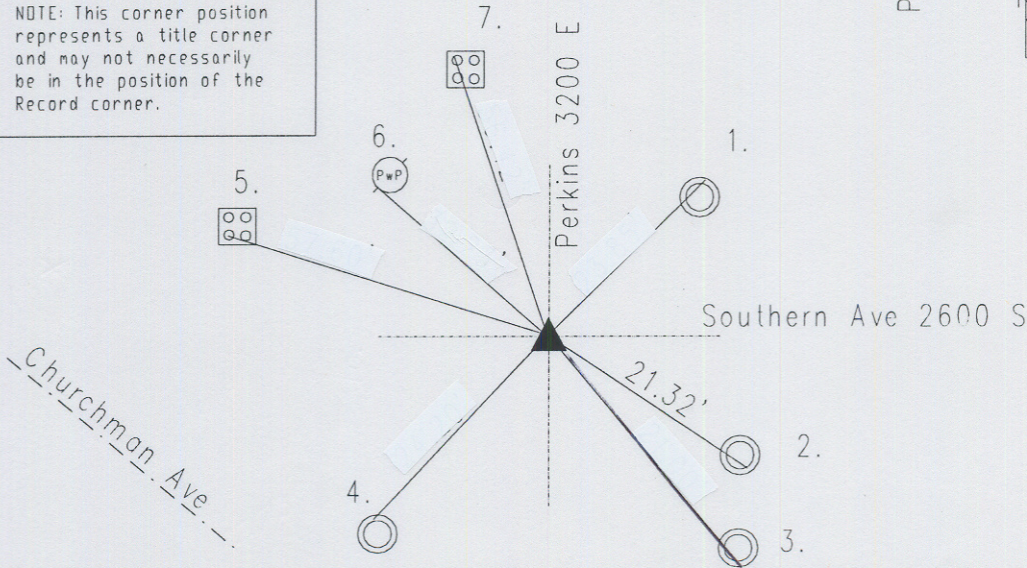

A survey by D.B. Hasbrook on June 27, 1853 indicates no stone but the following witnesses: 24" Beech bearing north 17.50 degrees, thence west 44 links; and a 24" Beech bearing south 6 degrees, thence east 40 links. (Center Legal Book p. 37) Corner referenced by Monroe on 3/23/59 and called a p.k. Nail. Corner referenced by Monroe on 4/23/59 and called a cut x. Corner referenced by Fortner on 6/12/75 and called an iron pin. Corner referenced by Gries on 11/18/88 and called an iron pin. Corner referenced by Kiste on 7/29/96 and called a mag nail with washer over steel pin. Corner referenced by Kiste on 5/25/01 and called a mag nail with washer over steel pin. Corner excavated on 12/13/02 by Whiteside and a rebar was found 5" down. No stone was found. A # 205 cast iron Harrison monument was set in position as the corner.

15042005

| REF. | DISTANCE | DESCRIPTION |
|------|----------|---|
| 1. | 23.73' | Cut 'x' NE edge manhole rim |
| 2. | 21.32' | Cut 'x' SE-edge of manhole rim |
| 3. | 20.94' | Cut 'x' NW-edge of manhole rim |
| 4. | 24.91' | Cut 'x' N edge of sewer manhole rim |
| 5. | 57.52' | Cut 'x' SW-bolt of old sign base |
| 6. | 32.43' | Mag nail w/brass washer SW PwP no# 6"up |
| 7. | 56.34' | Cut 'x' NW-bolt of old sign base |
| | | |
| | | |
| | | |